

ROTADAIRON®

RCH 60

STONE BURIER FOR REMOTE CONTROLLED TOOL CARRIER

RAKING

SOIL
PREPARATION

SEEDING

OVERSEEDING

DETHATCHING -
SPIKING

MULCHING



MADE IN FRANCE

STONE BURIER FOR REMOTE CONTROLLED TOOL CARRIER

RCH 60

Functions of the stone burier RCH 60

This soil preparer and stone burier is intended for remote controlled tool carrier. There are two versions of the machine hitch :

- MDB type hitch plate : RCH 60 MDB
- Adaptable to your carrier by your own : supplied without hitch plate, without hoses, without couplers : RCH 60 ADAPT

It allows the building or renovation of green spaces by preparing the seed bed before seeding. The machine is multi-purpose, it allows tilling, burying (stones, rubbish, herbs, etc.), levelling, mixing and rolling the surface. The use is done live or on a ground previously decompacted in depth and cleared of large stones.






Quality of service

A large stock of spare parts is permanently maintained at our factory. Our partners have online tools and quick access to manufacturer information. Maintain the quality and performance of your Rotadairon® by using only original parts.

- 1 Oversized rotor
- 2 Anti-pad blades (Rotadairon® patent)
- 3 Selection grid fingers
- 4 MDB type hitch plate
- 5 Machine without hitch plate, without hoses, without coupler
- 6 Soil preparation principle
- 7 Working depth adjustment
- 8 Grader blade
- 9 Option : Rear mesh roller side adjustment device by cylinder

| Machine | RCH 60 | |
|----------------------------------|--|---|
| Model | RCH 60 MDB | RCH 60 ADAPT |
| Hitch plate | MDB type hitch plate | Without hitch plate, without hoses, without coupler |
| | For specific request, please contact us | |
| Working width | 1500 mm (59") | |
| Total width | 1830 mm (72") | |
| Weight | 460 Kg (1014 lb) | 465 Kg (1025.1 lb) |
| Carrier : Hydraulic flow | 70 to 120 l/min (18,5 to 31,7 US gpm) | |
| Carrier : Pressure | 210 to 300 bars (3045 to 4350 psi) | |
| Carrier : Maximum track width | 1,8 meters (70" 4/5) | - |
| Working depth (max) | 140 mm (5" 1/2) | |
| Rotor outer diameter | 400 mm (15" 3/4) | |
| Depth adjustment | Support on rear roller adjustable by screw jacks | |
| Number of blades | 32 | |
| Grid finger spacing | 20 mm (4/5") | |
| Couplers | MDB Faster motor supply coupler not supplied Hydraulic 3-point couplers : 3/8" | - |
| Forward speed of the carrier | 0,8 to 1,5 Km/h (0.5 to 0.9 mph) | |
| Transmission | Hydraulic motor + chain in oil bath | |
| Security | Made by the carrier | |
| Transport dimension w x L x H | 1905 mm x 1605 mm x 700 mm (75" x 63" 1/4 x 27" 1/2) | |
| Option | - Rear mesh roller side adjustment device by cylinder (*) - Gravity grass seeder : SG 145 - Spial roller | |

(*) Requires auxiliary hydraulic line

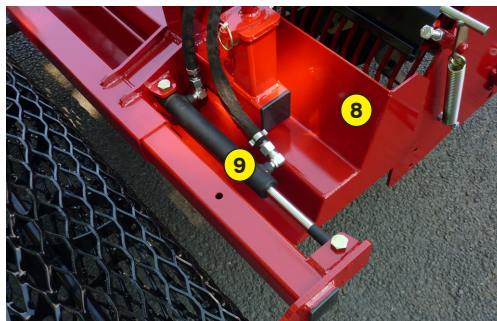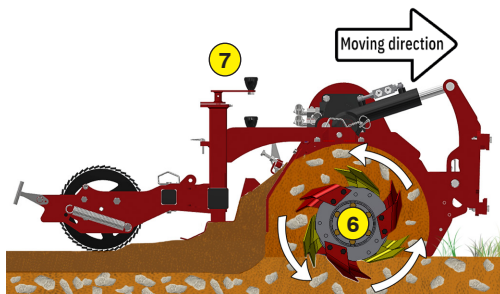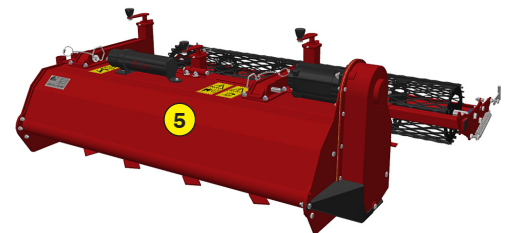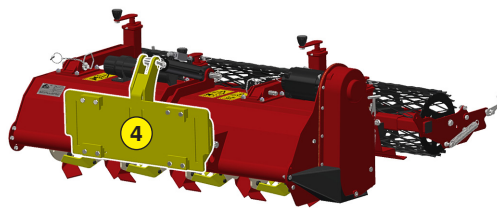

ROTADAIRON
Départementale 92 - Les Hunaudières
72230 Mulsanne - France
Mail : contact@rotadairon.fr
Phone number : (33) 2 43 422 422



www.rotadairon.fr