

# ROTADAIRON®

# RG2000

## KNIFE OVERSEEDING MACHINE

WEEDING

RAKING

SOIL  
PREPARATION

SEEDING

OVERSEEDING

DETHATCHING-  
SPIKING

MULCHING



MADE IN FRANCE

# KNIFE OVERSEEDING MACHINE

## RG 200

### Functions of the overseeder RG 200



This overseeding machine allows you to perform your over-seeding operations in an economical way. The rotating knives create a groove in which the pods deposit the seeds. The machine allows a high precision seeding which is obtained by volumetric adjustment of all the cells constituting the rotor of the seed drill. The furrows are closed, naturally, by the elasticity of the grass but also by the passage of the roller with special tires. The cleaning of the tank is simplified thanks to the tool-free extraction of the agitator.

### Quality of service

A large stock of spare parts is permanently maintained at our factory. Our partners have online tools and quick access to manufacturer information. Maintain the quality and performance of your Rotadairon® by using only original parts.

| Machine                          | RG 200  |
|----------------------------------|---|
| Working width                    | 1830 mm (72")   |
| Total width                      | 2270 mm (89" 1/4)                                       |
| Weight                           | 580 Kg (1278.6 lb)                                      |
| Tractor : Required power         | 25 - 60 CV  |
| Working depth (max)              | 0 to 60 mm (0" to 2" 1/4)                               |
| Interval between sowing          | 48 mm (1" 7/8)  |
| Rotor outer diameter             | 400 mm (15" 3/4)  |
| Number of knives                 | 117   |
| Depth adjustment                 | Screw jack system                                       |
| 3 point hitch                    | Categories 1 & 2  |
| PTO speed                        | 540 tr/min  |
| Tractor forward speed            | 0,8 to 1,5 Km/h (0.5 to 0.9 mph)                        |
| Transmission                     | Angle gearbox<br>+ Oil bath chain                       |
| Transport dimension<br>w x L x H | 2270 mm x 1500 mm x 930 mm<br>(89" 1/4 x 59" x 36" 1/2) |
| <b>Seeder</b>                    |   |
| Type of seed drill               | Stainless steel seed drill by spline distributor        |
| Seed rate adjustment             | Adjustment clock 0 to 12 o'clock                        |
| Seed drill capacity              | 178 liters (47 US gal)                                  |

- 1** Floating 3rd point hitch for better ground following
- 2** Clean cut by the knives
- 3** Precise dosing of seed quantities with the spline seed drill
- 4** Stainless steel seed drill with spline dispenser
- 5** Special tire roller

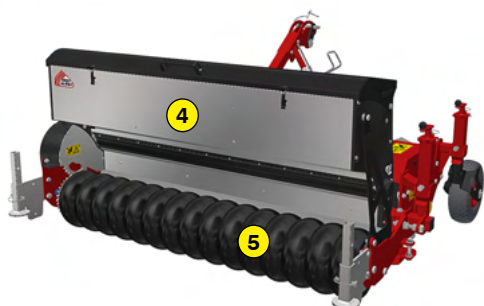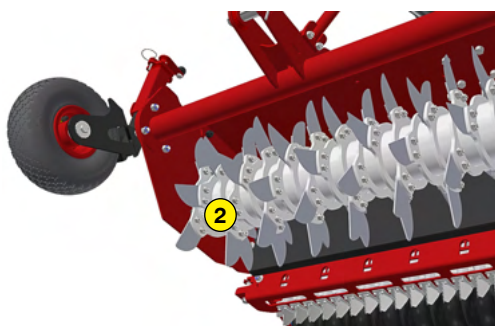

ROTADAIRON  
Départementale 92 - Les Hunaudières  
72230 Mulsanne - France  
Mail : [contacts@rotadairon.fr](mailto:contacts@rotadairon.fr)  
Phone number : (33) 2 43 422 422



[www.rotadairon.fr](http://www.rotadairon.fr)