

# ROTADAIRON®

## **STABNET** 160T

TRACTOR-MOUNTED MECHANICAL WEEDERS

WEEDING

RAKING

SOIL  
PREPARATION

SEEDING

OVERSEEDING

DETHATCHING-  
SPIKING

MULCHING



MADE IN FRANCE

# TRACTOR-MOUNTED MECHANICAL WEEDERS

## Functions of the StabNet 160T tractor-mounted mechanical weeders





The StabNet 160T is a multifunctional mechanical weeder. The machine can be used for maintenance or curative weeding at high output. It works in BOTH forward and reverse and has a tilt function, making it highly productive. The machine can also be used for levelling operations, decompacting and reprofiling driveways.

## Quality of service

A large stock of spare parts is permanently maintained at our factory. Our partners have online tools and quick access to manufacturer information. Maintain the quality and performance of your Rotadairon® by using only.

- 1 Weed control: weeding deck (Patent)
- 2 Raking : row of fixed or free-standing spreader flails
- 3 Finishing harrowing: shakes off unwanted weeds
- 4 Rear roller: for a smooth finish
- 5 Steering wheel adjustment : depth
- 6 Steering wheel adjustment : rolling
- 7 Steering wheel adjustment : remote hitche
- 8 Option : edge trimmer with sharpened disc

| Machine                          | StabNet 160T                                   |
|----------------------------------|------------------------------------------------|
| Working width                    | 1600 mm (62" 15/16)                            |
| Weight                           | 620 Kg (1366.9 lb)                             |
| Tractor : Required power         | 45 CV (45 HP)                                  |
| Maximum lateral offset           | 350 mm (13" 3/4)                               |
| Working depth (adjustable)       | 5 à 50 mm (0" 3/16 to 19" 3/4)                 |
| 3 point hitch (removable)        | Categories 1 & 2                               |
| Working capacity                 | Until 12 000 m <sup>2</sup> /h (129 166 sq/ft) |
| Recommended forward speed        | 8 à 10 km/h (5 to 6 m/h)                       |
| Transport dimension<br>l x L x H | 1300 mm x 1900 mm x 1500 mm                    |
| Number of cups                   | 15                                             |
| Row of flails                    | 2                                              |
| Option                           | Edge trimmer with sharpened disc               |

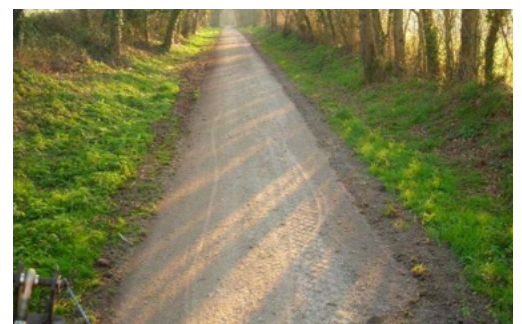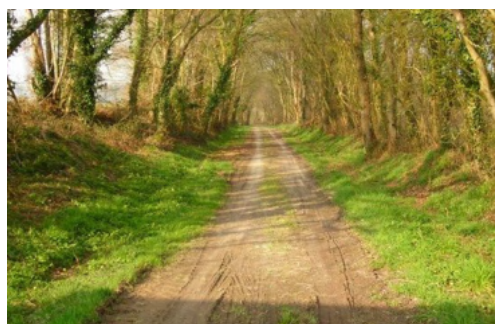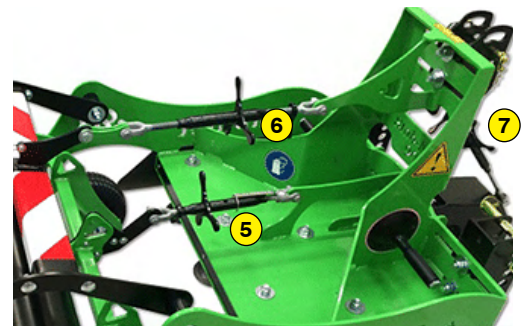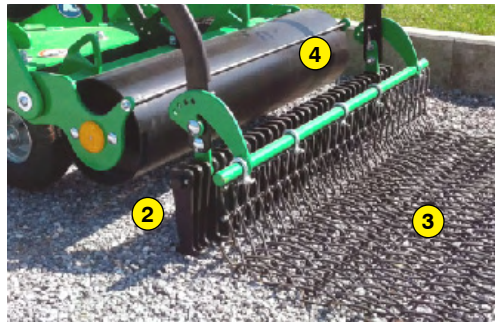

Before

After



ROTADAIRON  
Départementale 92 - Les Hunaudières  
72230 Mulsanne - France  
Mail : contact@rotadairon.fr  
Phone : (33) 2 43 422 422



[www.rotadairon.fr](http://www.rotadairon.fr)