

# ROTADAIRON®

# RG2000

## KNIFE OVERSEEDING MACHINE

RAKING

PREPARATION

SEEDING

OVERSEEDING

SPIKING

MULCHING



MADE IN FRANCE

# KNIFE OVERSEEDING MACHINE

## RG 200

### Functions of the overseeder RG 200




This overseeding machine allows you to perform your over-seeding operations in an economical way. The rotating knives create a groove in which the pods deposit the seeds. The machine allows a high precision seeding which is obtained by volumetric adjustment of all the cells constituting the rotor of the seed drill. The furrows are closed, naturally, by the elasticity of the grass but also by the passage of the roller with special tires. The cleaning of the tank is simplified thanks to the tool-free extraction of the agitator.

### Quality of service

A large stock of spare parts is permanently maintained at our factory. Our partners have online tools and quick access to manufacturer information. Maintain the quality and performance of your Rotadairon® by using only original parts.

Machine	RG 200
Working width	1830 mm (72")
Total width	2270 mm (89" 1/4)
Weight	580 Kg (1278.6 lb)
Tractor : Required power	25 - 60 CV
Working depth (max)	0 to 60 mm (0" to 2" 1/4)
Interval between sowing	48 mm (1" 7/8)
Rotor outer diameter	400 mm (15" 3/4)
Number of knives	117
Depth adjustment	Screw jack system
3 point hitch	Categories 1 & 2
PTO speed	540 tr/min
Tractor forward speed	0,8 to 1,5 Km/h (0.5 to 0.9 mph)
Transmission	Angle gearbox + Oil bath chain
Transport dimension w x L x H	2270 mm x 1500 mm x 930 mm (89" 1/4 x 59" x 36" 1/2)
Seeder	
Type of seed drill	Stainless steel seed drill by spline distributor
Seed rate adjustment	Adjustment clock 0 to 12 o'clock
Seed drill capacity	178 liters (47 US gal)

- 1 Floating 3rd point hitch for better ground following
- 2 Clean cut by the knives
- 3 Precise dosing of seed quantities with the spline seed drill
- 4 Stainless steel seed drill with spline dispenser
- 5 Special tire roller

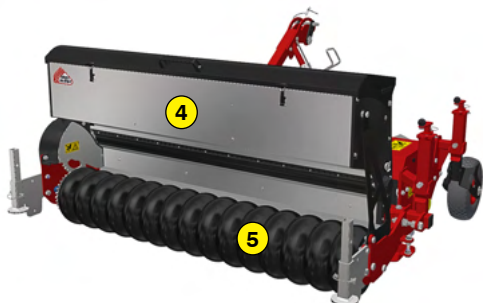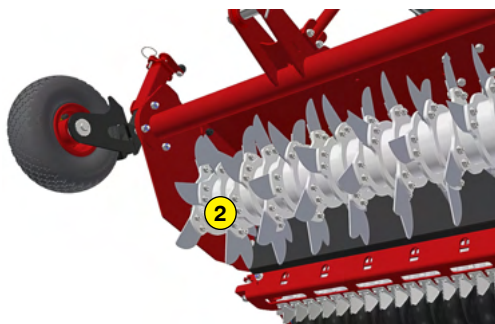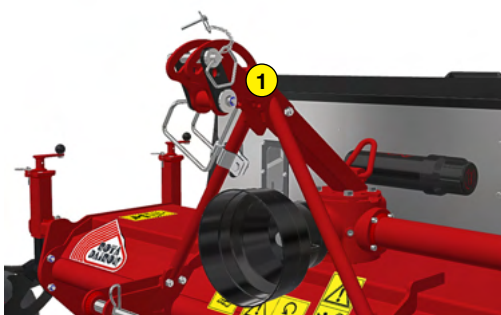

ROTADAIRON  
Départementale 92 - Les Hunaudières  
72230 Mulsanne - France  
Mail : [contacts@rotadairon.fr](mailto:contacts@rotadairon.fr)  
Phone number : (33) 2 43 422 422



[www.rotadairon.fr](http://www.rotadairon.fr)